

## Toshiba Air Conditioning - RAV-RM Data Sheet

### RAV-RM301KRTP-E High-Wall

#### Features

- Redesigned for use with refrigerant R32
- Self-cleaning feature
- Automatic louvre swing pattern to distribute the air evenly into the room
- Wireless remote controller with pre-set functions or hard-wired remote controller option




#### Technical Data

Model reference			RAV-RM301KRTP-E
Nominal	Cooling Capacity	kW	2.5
	Heating Capacity	kW	3.4
	EER/COP	W/W	4.10/4.00
UK	Cooling Total/Sensible	kW	2.37/1.97
	Heating	kW	2.43
Cooling EN14825	Range Min. - Max.	kW	0.9 - 3.0
	Power Input	kW	0.61
	Pdesign	kW	-*
	SEER/Energy Efficiency Class		6.36/A++
Heating EN14825	Range Min. - Max.	kW	0.8 - 4.5
	Power Input	kW	0.85
	Pdesign	kW	-*
	SCOP/Energy Efficiency Class		4.10/A+
Air Flow	High - Medium - Low	l/s	186 - 150 - 125
	High - Medium - Low	m <sup>3</sup> /h	670 - 540 - 450
Sound	Pressure High - Medium - Low	dB(A)	40 - 34 - 29
	Power High - Medium - Low	dB(A)	55 - 49 - 44
Unit	Height x Width x Depth	mm	293 x 798 x 230
	Weight	kg	10
Pipe Connection	Flare Connections (gas - liquid)	inch	3/8 - 1/4
	Drain Pipe Connection OD/ID	mm	VP16/14
Remote Controller			WH-TA09NE (Infra-red)
Power Cable	Outdoor to Indoor		3 core + earth

\* Waiting for published data.

#### Dimensional Drawings

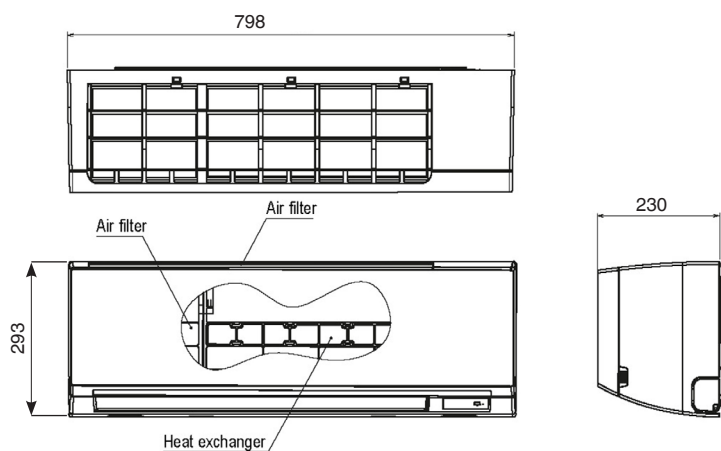

### Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info



All UK duties are based on Cooling Indoor air temperature 22°C DB/16°C WB Outdoor air temperature 28°C DB 50% RH, high fan speed, 5 m pipe run.  
Heating Indoor air temperature 20°C DB Outdoor air temperature -5°C DB 100% RH, high fan speed, 5 m pipe run. Values are based on the maximum compressor output.  
Data obtained from Toshiba Air Conditioning Published Data July 2018.