

Toshiba Air Conditioning - RAV-RM Data Sheet

RAV-RM561KRTP-E High-Wall



Features


- Redesigned for use with refrigerant R32
- Self-cleaning feature
- Automatic louvre swing pattern to distribute the air evenly into the room
- Wireless remote controller with pre-set functions or hard-wired remote controller option

Technical Data

Model reference			RAV-RM561KRTP-E
Nominal	Cooling Capacity	kW	5.0
	Heating Capacity	kW	5.3
	EER/COP	W/W	3.01/3.42
UK	Cooling Total/Sensible	kW	4.75/3.61
	Heating	kW	3.79
Cooling EN14825	Range Min. - Max.	kW	1.5 - 5.6
	Power Input	kW	1.66
	Pdesign	kW	-*
	SEER/Energy Efficiency Class		6.19/A++
	Seasonal Energy Consumption	kWh/a	-*
Heating EN14825	Range Min. - Max.	kW	1.5 - 6.3
	Power Input	kW	1.55
	Pdesign	kW	-*
	SCOP/Energy Efficiency Class		4.00/A+
	Seasonal Energy Consumption	kWh/a	-*
Air Flow	High - Medium - Low	l/s	267 - 231 - 189
	High - Medium - Low	m ³ /h	960 - 830 - 680
Sound	Pressure High - Medium - Low	dB(A)	42 - 39 - 36
	Power High - Medium - Low	dB(A)	57 - 54 - 51
Unit	Height x Width x Depth	mm	320 x 1050 x 250
	Weight	kg	14
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2 - 1/4
	Drain Pipe Connection OD/ID	mm	VP16/14
Remote Controller			WH-TA09NE (Infra-red)
Power Cable	Outdoor to Indoor		3 core + earth

* Waiting for published data.

Dimensional Drawings

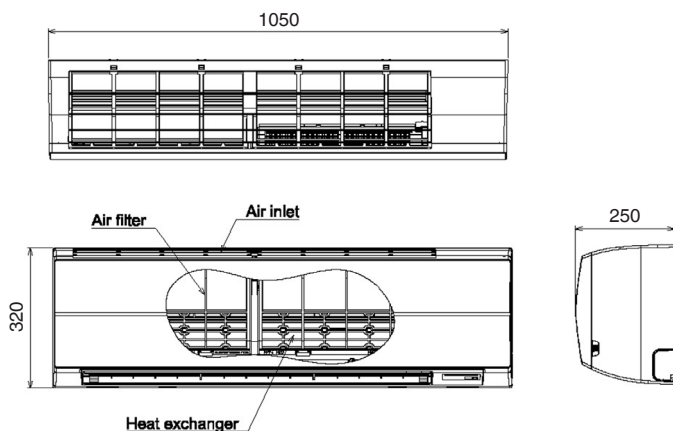

Cool Designs Ltd

Raising the Standards in Air Conditioning Distribution

www.cdlweb.info



All UK duties are based on Cooling Indoor air temperature 22°C DB/16°C WB Outdoor air temperature 28°C DB 50% RH, high fan speed, 5 m pipe run.
Heating Indoor air temperature 20°C DB Outdoor air temperature -5°C DB 100% RH, high fan speed, 5 m pipe run. Values are based on the maximum compressor output.
Data obtained from Toshiba Air Conditioning Published Data July 2018.