


# Toshiba Air Conditioning RAV R32 GM1101 Line-up Data Sheet

RAV-GM1101KRTP-E  
High-Wall

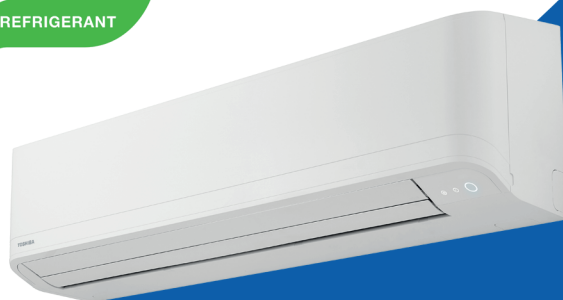


Model Reference	RAV-GM1101KRTP-E		
Nominal	Cooling Capacity	kW	9.5
	Heating Capacity	kW	11.2
	EER/COP	W/W	3.20 / 3.23
U.K.	Cooling Total/Sensible	kW	9.28 / 7.22
	Heating	kW	8.0
Cooling EN14825	Range Min-Max	kW	3.0 - 11.2
	Power Input	kW	2.97
	Pdesign	kW	9.5
	SEER/Energy Efficiency Class		6.1 / A++
	Seasonal Energy Consumption	kWh/a	-*
Heating EN14825	Range Min-Max	kW	3.0 - 13.0
	Power Input	kW	3.47
	Pdesign	kW	8.0
	SCOP/Energy Efficiency Class		4.2 / A+
	Seasonal Energy Consumption	kWh/a	-*
Air Flow	High - Medium - Low	l/s	447 - 375 - 328
	High - Medium - Low	m <sup>3</sup> /h	1610 - 1350 - 1180
Sound	Pressure High - Medium - Low	dB(A)	49 - 45 - 41
	Power High - Medium - Low	dB(A)	64 - 60 - 56
Unit	Height - Width - Depth	mm	348 x 1200 x 280
	Weight	kg	19
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Drain Pipe Connection OD/ID	mm	VP16 / 14
Remote Controller			WH-TA09NE (Infra-red)
Power Cable	Outdoor to Indoor		3 Core + E

\* Waiting for published data

# TOSHIBA

## Dimensional Drawings

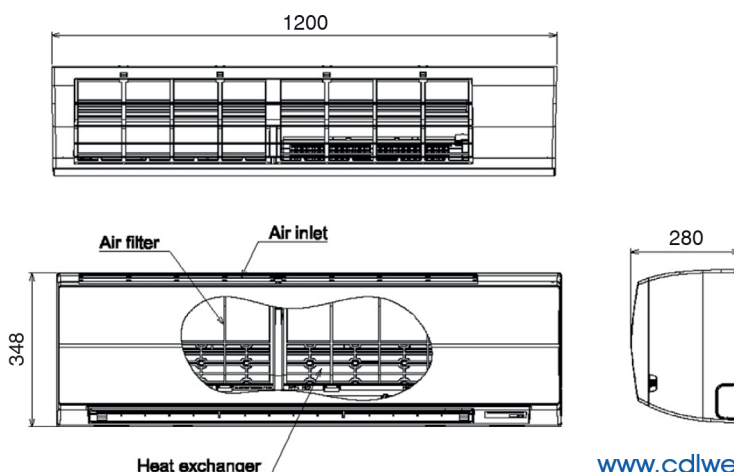

- For use with refrigerant R32
- Easy installation
- Special coating fan coil unit fin (magic coil)
- Wireless remote controller with pre-set functions or hard-wired remote controller option

[www.cdlweb.info](http://www.cdlweb.info)

UK capacities are based on the following conditions: Cooling: Indoor 23°C DB/16°C WB ~ Outdoor 29°C DB Heating: Indoor 20°C DB ~ Outdoor -5°C/100% RH Nominal capacities are based on NEMA Cooling: Indoor 27°C DB/19°C WB ~ Outdoor 35°C DB Heating: Indoor 20°C DB ~ Outdoor 7°C/100% RH 7.5m Pipe Run and High Speed. Data from Toshiba Air Conditioning July 2019