


# Wall mounted unit

FTXTA-AW + RXTA-N



BLUEEVOLUTION stylish

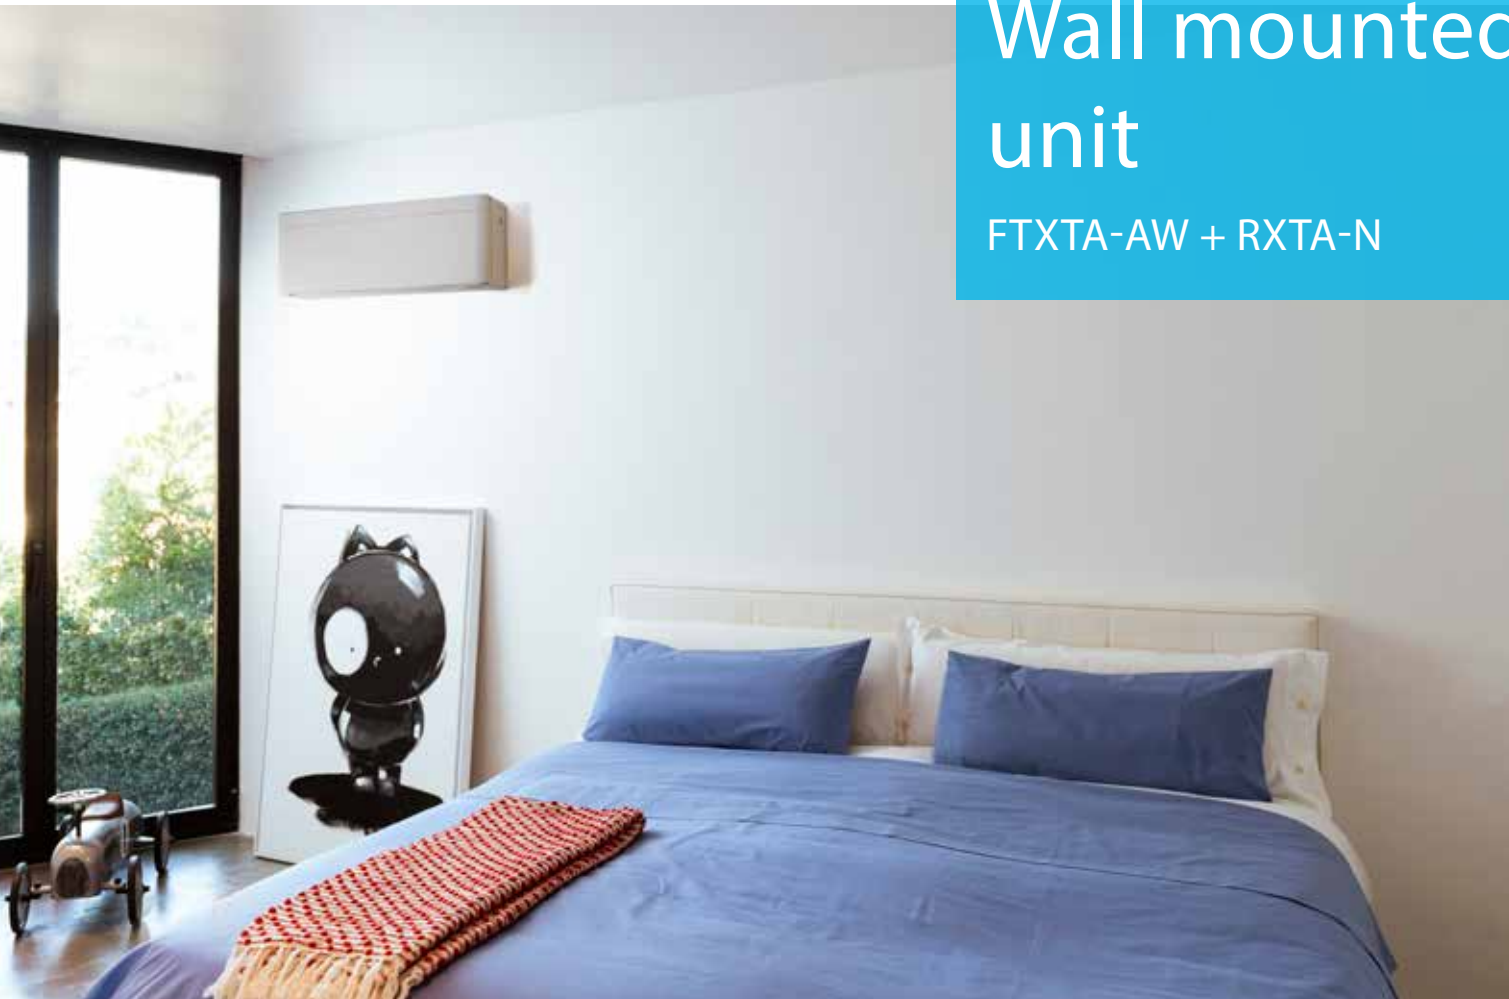

Guaranteed operation down to -25°C



Practically inaudible



Fireplace logic



Online controller via app

## Attractive, wall mounted design with perfect indoor air quality

- › Guaranteed heating capacity down to -25°C
- › Even temperature distribution thanks to fire place logic
- › Compact design in matt crystal white
- › Perfect temperature distribution thanks to Coanda effect
- › Intelligent thermal sensor: air flow is adjusted when detecting temperature differences
- › Daikin Flash Streamer technology: powerful air purification
- › Practically inaudible
- › Online controller via app
- › Bluevolution range: lower environmental impact
- › Seasonal efficiency values up to A+++ in cooling and heating
- › Developed for regions with severe winter conditions
- › Improved defrost technology resulting in lower running costs

# FTXTA-AW + RXTA-N



Efficiency data		FTXTA + RXTA	30AW + 30N	
Cooling capacity	Min./Nom./Max.	kW	0.70/3.00/4.50	
Heating capacity	Min./Nom./Max.	kW	0.80/3.20/6.90	
Power input	Cooling	Nom. kW	0.71	
	Heating	Nom. kW	0.66	
Space cooling	Energy efficiency class		A++	
	Capacity	Pdesign kW	3.00	
	SEER		7.63	
	Annual energy consumption	kWh/a	138	
Space heating (Average climate)	Energy efficiency class		A+++	
	Capacity	Pdesign kW	2.60	
	SCOP/A		5.10	
	Annual energy consumption	kWh/a	714	
Space heating (Cold climate)	Energy efficiency class		A+	
	Capacity	Pdesign kW	3.80	
	Annual energy consumption	kWh/a	1,946	
	SCOP/C		4.10	
Nominal efficiency	EER		4.20	
	COP		4.87	
	Annual energy consumption		kWh	357
	Energy labeling Directive	Cooling/Heating	A/A	

See separate drawing for electrical data | See separate drawing for operation range | Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m.

Indoor unit		FTXTA	30AW
Dimensions	Unit	HeightxWidthxDepth mm	295x798x189
Weight	Unit	kg	11.5
Air filter	Type Removable / washable		
Fan	Air flow	Cooling Silent operation/Low/ m <sup>3</sup> /min	4.6/5.7/8.3/11.9
	rate	Heating Silent operation/Low/ m <sup>3</sup> /min	5.1/6.0/8.0/11.5
Sound power level	Cooling		60
	Heating		60
Sound pressure level	Cooling	Silent operation/Low/High dBA	20/25/43
	Heating	Silent operation/Low/High dBA	19/24/41
Control systems	Infrared remote control		ARC466A59
	Wired remote control		BRC073A4

Outdoor unit		RXTA	30N	
Dimensions	Unit	HeightxWidthxDepth mm	551x763x312	
Weight	Unit	kg	38	
Sound power level	Cooling		61	
	Heating		61	
Sound pressure level	Cooling	Nom. dBA	48	
	Heating	Nom. dBA	49	
Operation range	Cooling	Ambient Min.~Max. °CDB	-10~-46	
	Heating	Ambient Min.~Max. °CWB	-25~-18	
Refrigerant	Type		R-32	
	GWP		675	
	Charge		kg/TCO2Eq	1.1/0.75
Piping connections	Liquid	OD mm	635	
	Gas	OD mm	9.50	
	Piping length	OU - IU Max. m	20	
	Additional refrigerant charge		kg/m	0.02 (for piping length exceeding 10m)
	Level difference		IU - OU Max. m	15
Power supply	Phase/Frequency/Voltage		1~/50/220-240	
Current - 50Hz	Maximum fuse amps (MFA)		A	

See separate drawing for electrical data | See separate drawing for operation range | Contains fluorinated greenhouse gases

Daikin Europe N.V. 0 · goliat.d@daikineurope.com · 0 0 · Poland · 0 · 0 · 0 (Responsible Editor)



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Liquid Chilling Packages and Hydronic Heat Pumps, Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com

08/2019

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

