

MSZ-EF R32

Zen Wall Mounted System

Inverter Heat Pump



Black (B)



Silver (S)



White (W)



The Zen Series is a wall mounted system that blends energy efficiency with a sophisticated, streamlined design.

Combining an impressively low power consumption with a quiet, yet powerful performance, units have a distinctively styled front panel that not only looks appealing, but also helps to make cleaning of the unit easier.

Designed to complement modern interior décor and suitable for a wide range of applications, Zen units blend in naturally wherever they are installed and are available in three colours; black, silver and white. To aid control and energy saving, the universal controller has an inbuilt 7 day timeclock.

Key Features

- Stylish design in a range of three distinct colours
- Energy efficient operation with a powerful performance
- Built-in Wi-Fi interface enabling control and monitoring via the MELCloud app - now compatible with Alexa
- New backlit controllers



MSZ-EF B/S/W - INDOOR UNITS		MSZ-EF25VGK B/S/W	MSZ-EF35VGK B/S/W	MSZ-EF50VGK B/S/W
CAPACITY (kW)	Heating (nominal)	3.2 (1.0-4.2)	4.0 (1.3-5.1)	5.8 (1.4-7.5)
	Cooling (nominal)	2.5 (0.9-3.4)	3.5 (1.1-4.0)	5.0 (1.4-5.4)
	Heating (UK)	2.65 (0.91-3.49)	3.32 (1.08-4.23)	4.82 (1.16-6.23)
	Cooling (UK)	2.48 (0.89-3.37)	3.47 (1.09-3.96)	4.96 (1.39-5.36)
SHF (nominal)		0.97	0.80	0.70
COP / EER (nominal)		4.57 / 4.63	4.21 / 3.85	3.72 / 3.25
SCOP / SEER (BS EN14825)		4.7 / 9.1	4.6 / 8.8	4.5 / 7.5
ErP ENERGY EFFICIENCY CLASS	Heating/Cooling	A++ / A+++	A++ / A+++	A+ / A++
AIRFLOW (l/s)	Heating/Cooling - SLo-Lo-Mi-Hi-SHi	67-77-103-148-198 / 67-77-105-138-175	67-77-103-148-212 / 67-77-105-138-175	107-120-150-185-243 / 97-113-132-153-188
PIPE SIZE mm (in)	Gas	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
	Liquid	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling - SLo-Lo-Mi-Hi-SHi	21-24-29-37-45 / 19-23-29-36-42	21-24-30-38-46 / 21-24-30-36-42	30-33-37-43-49 / 30-33-36-40-43
SOUND POWER LEVEL (dBA)		60	60	60
DIMENSIONS (mm)	Width x Depth x Height	885 x 195 x 299	885 x 195 x 299	885 x 195 x 299
WEIGHT (kg)		11.5	11.5	11.5
ELECTRICAL SUPPLY		Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
FUSE RATING (BS88) – HRC (A)		6	6	6
INTERCONNECTING CABLE No. CORES		4	4	4

Notes: Black (B), Silver (S), White (W)

MUZ-EF - OUTDOOR UNITS		MUZ-EF25VG	MUZ-EF35VG	MUZ-EF50VG
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	48 / 47	50 / 49	52 / 52
SOUND POWER LEVEL (dBA)	Cooling	58	62	65
WEIGHT (kg)		31	34	40
DIMENSIONS (mm)	Width x Depth x Height	800 x 285 x 550	800 x 285 x 550	800 x 285 x 714
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	0.70 / 0.54	0.95 / 0.91	1.56 / 1.54
	Heating/Cooling (UK)	0.64 / 0.44	0.87 / 0.73	1.42 / 1.24
STARTING CURRENT (A)		3.6	4.4	7.1
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	3.6 / 3.0 [6.8]	4.4 / 4.2 [6.8]	7.1 / 6.9 [13.6]
FUSE RATING (BS88) – HRC (A)		10	10	16
MAINS CABLE No. CORES		3	3	3
MAX PIPE LENGTH (m)		20	20	30
MAX HEIGHT DIFFERENCE (m)		12	12	15
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675) - 7m		0.62 / 0.42	0.74 / 0.50	1.05 / 0.71
MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675)		0.26 / 0.18	0.26 / 0.18	0.46 / 0.31

Accessories

Outdoor Units

MAC-889SG

Air outlet guides for MUZ-EF25/35VG

MAC-882SG

Air outlet guides for MUZ-EF50VG

System Control Units

PAR-CT01MAA-SB/PB

Touch screen wired remote controller (PB = Premium Finish)

PAR-40MAA

Standard wired remote controller

MAC-334F

Interface for M-NET, MA remote controller (PAR-40MAA / PAR-CT01MAA), on/off input and run/fault output

MAC-397IF

Interface for MA remote controller (PAR-40MAA / PAR-CT01MAA), on/off input and run or fault output

MELCOBEMS MINI

Modbus and BACnet MSTP CN105 adaptor


MELCORETAIL MINI

Retail control and input / output interface

Product Dimensions

MSZ-EF25/35/50VGK B/S/W

Upper View

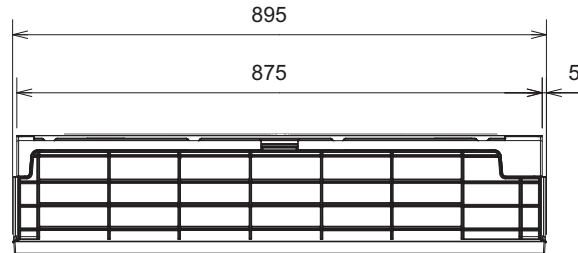

Front View

