

MSZ-LN R32

Wall Mounted System

Inverter Heat Pump



Ruby Red (R)



Onyx Black (B)



Pearl White (V)



Natural White (W)



The **MSZ-LN range** is a wall mounted system that blends energy efficiency with a sophisticated streamlined design. Finished with a choice of deep, rich colours and a premium quality feel, this range features the latest product innovations, all designed to enhance the user experience.

Key Features

- 3D i-see sensor provides customised comfort by automatically monitoring room occupancy, position and body temperatures
- Plasma Quad Plus filter uses powerful plasma technology to filter out even microscopic particles
- Dual-Barrier Coating to the heat exchanger, fan and air duct prevents dust and grease accumulation
- Built-in Wi-Fi interface enabling control and monitoring via the MELCloud app - now compatible with Alexa
- New backlit controllers



MSZ-LN - INDOOR UNITS		MSZ-LN18VG2 R/B/V/W	MSZ-LN25VG2 R/B/V/W	MSZ-LN35VG2 R/B/V/W	MSZ-LN50VG2 R/B/V/W	MSZ-LN60VG2 R/B/V/W
CAPACITY (KW)	Heating (nominal)	2.0 (0.9 - 4.0)	3.2 (0.8 - 5.4)	4.0 (1.0 - 6.3)	6.0 (1.0 - 8.2)	6.8 (1.8 - 9.3)
	Cooling (nominal)	1.8 (0.9 - 3.0)	2.5 (1.0 - 3.5)	3.5 (0.8 - 4.0)	5.0 (1.0 - 6.0)	6.1 (1.4 - 6.9)
	Heating (UK)	-	2.64 (0.66 - 4.45)	3.3 (0.83 - 5.2)	4.94 (0.82 - 6.75)	5.6 (1.48 - 7.66)
	Cooling (UK)	-	2.48 (0.99 - 3.47)	3.47 (0.79 - 3.96)	4.95 (0.99 - 5.94)	6.05 (1.38 - 6.84)
SHF (nominal)	-	0.97	0.90	0.77	0.75	0.75
OOP / EER (nominal)	-	5.52 / 5.15	5.00 / 4.27	4.05 / 3.62	3.76 / 3.41	3.76 / 3.41
SCOP / SEER (BS EN14825)	-	5.2 / 10.5	5.1 / 9.5	4.6 / 8.5	4.6 / 7.5	4.6 / 7.5
ErP ENERGY EFFICIENCY CLASS	Heating/Cooling	-	A+++ / A+++	A+++ / A+++	A+++ / A+++	A+++ / A+++
AIRFLOW (l/s)	Heating (SLo-Lo-Mi-Hi-SHi)	67-95-118-142-240	67-95-118-142-240	71-97-118-142-228	90-107-142-178-262	110-158-192-227-262
	Cooling (SLo-Lo-Mi-Hi-SHi)	71-97-118-147-198	71-97-118-147-198	71-97-118-147-213	95-127-148-177-232	118-147-177-212-262
PIPE SIZE MM (in)	Gas	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	12.7 (1/2")
	Liquid	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")
SOUND PRESSURE LEVEL (dBA)	Heating (SLo-Lo-Mi-Hi-SHi)	19-24-29-36-45	19-24-29-36-45	19-24-29-36-45	25-29-34-39-47	29-37-41-45-49
	Cooling (SLo-Lo-Mi-Hi-SHi)	19-23-29-36-42	19-23-29-36-42	19-24-29-36-43	27-31-35-39-46	29-37-41-45-49
SOUND POWER LEVEL (dBA)	-	58	58	58	60	65
DIMENSIONS (mm)	Width x Depth x Height	890 x 233 x 307	890 x 233 x 307	890 x 233 x 307	890 x 233 x 307	890 x 233 x 307
WEIGHT (kg)	-	15.5	15.5	15.5	15.5	15.5
ELECTRICAL SUPPLY	-	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)	-	6	6	6	6	6
INTERCONNECTING CABLE No. CORES	-	4	4	4	4	4

Notes: MSZ-LN18VG only available with R32 MXZ Multi-Split outdoor units. Ruby Red (R), Onyx Black (B), Pearl White (V), Natural White (W).

MUZ-LN - OUTDOOR UNITS		N/A MULTI-SPLIT ONLY	MUZ-LN25VG2	MUZ-LN35VG2	MUZ-LN50VG2	MUZ-LN60VG2
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	-	49 / 46	50 / 49	54 / 51	55 / 55
SOUND POWER LEVEL (dBA)	Cooling	-	60	61	64	65
WEIGHT (kg)	-	-	35	35	40	55
DIMENSIONS (mm)	Width x Depth x Height	-	800 x 285 x 550	800 x 285 x 550	800 x 285 x 714	840 x 330 x 880
ELECTRICAL SUPPLY	-	-	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE	-	-	Single	Single	Single	Single
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	-	0.580 / 0.485	0.800 / 0.820	1.480 / 1.380	1.810 / 1.790
	Heating/Cooling (UK)	-	0.523 / 0.406	0.722 / 0.686	1.335 / 1.151	1.632 / 1.494
STARTING CURRENT (A)	-	-	3.0	4.0	6.8	7.9
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	-	3.0 / 2.5 [7.1]	4.0 / 3.9 [9.9]	6.8 / 6.3 [13.9]	7.9 / 7.9 [15.2]
FUSE RATING (BS88) - HRC (A)	-	-	10	10	16	16
MAINS CABLE No. CORES	-	-	3	3	3	3
MAX PIPE LENGTH (m)	-	-	20	20	30	30
MAX HEIGHT DIFFERENCE (m)	-	-	12	12	12	15
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675) - 7m	-	-	1.0 / 0.68	1.0 / 0.68	1.25 / 0.85	1.45 / 0.98
MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675)	-	-	0.26 / 0.18	0.26 / 0.18	0.26 / 0.18	0.46 / 0.32

Accessories

Outdoor Units

MAC-889SG

Air outlet guide for MUZ-LN25/35VG2

MAC-882SG

Air outlet guide for MUZ-LN50VG2

MAC-886SG

Air outlet guide for MUZ-LN60VG2

System Control Units

PAR-CT01MAA-SB/PB

Touch screen wired remote controller (PB = Premium Finish)

PAR-40MAA

Standard wired remote controller

MAC-334F

Interface for M-NET, MA remote controller (PAR-40MAA / PAR-CT01MAA), on/off input and run/fault output

MAC-397IF

Interface for MA remote controller (PAR-40MAA / PAR-CT01MAA), on/off input and run or fault output

MELCOBEMS MINI


Modbus and BACnet MSTP CN105 adaptor

MELCORETAIL MINI


Retail control and input / output interface

Product Dimensions

MSZ-LN25/35/50/60VG2 R/B/V/W

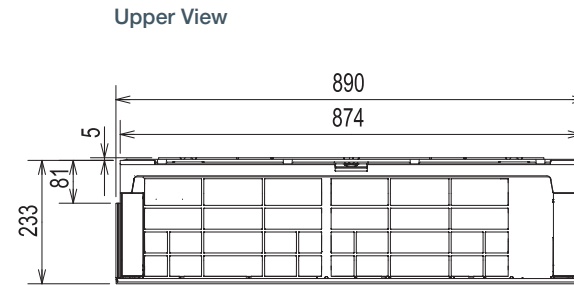

Front View

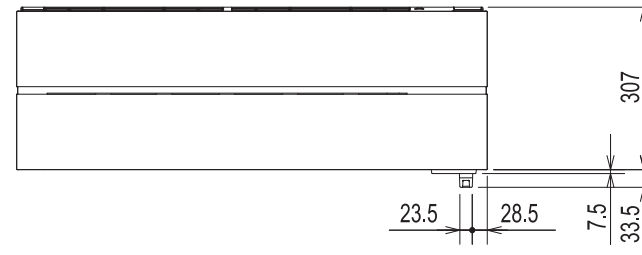

Side View

