

## NEW AQUAREA HIGH PERFORMANCE MONO-BLOC J GENERATION

The compact, high performance heat pump for new installations and low energy homes

## AQUAREA MONO BLOC J GENERATION PROVIDES BOTH DOMESTIC HOT WATER AND HEAT FOR RADIATORS AND UNDERFLOOR HEATING FROM ONE COMPACT OUTDOOR UNIT.



### Adapts to your home

The Aquarea High Performance monobloc range is extremely flexible. Selecting from a range of capacities, from 5kW to 9kW, you can find lower initial investment and lower operational cost options. If you have a well insulated home, why install oversized equipment that will cost more and will have higher running costs? The range fully adapts the system to the needs of your home, whether it is a new build or a refurbishment, as it is able to reach up to 60°C water outlet.



### More comfort

The Aquarea Heat Pump is able to precisely control the temperature thanks to reliable Panasonic Inverter Compressors. Aquarea can also cool space in summer and bring hot water all year round, offering different modes to give the ultimate comfort.



### Heat Pump, 80% of energy for free

Based on Air to Water heat pump technology, Aquarea is highly efficient and environmentally friendly. It captures heat energy from the ambient air and transfers it to heat the water needed to warm your home, for domestic hot water and even to cool the house if wished. In this way, up to 80% of the heat energy required is taken from the ambient air - even in extremely low temperatures.



### Space-saving solution

Aquarea High Performance Monobloc is the ideal space-saving solution for any home as the unit does not require a separate hydrokit inside. Additionally, thanks to the unit's neat design, all refrigerant is sealed in the compact outdoor unit, leaving only water pipes needed inside the property. For further space-saving ideas, combine Aquarea Monobloc with a Combo tank, which incorporates the DHW with a buffer tank.




### Why Panasonic?

**Panasonic has more than 60 years of Heat Pump experience, having produced an exceptional amount of compressors. Quality is what Panasonic stands for and this is a key factor for succeeding in the European market.**

**As a member of the European Heat Pump Association, the production of Aquarea in Europe and maintaining high security protocols in European servers for the Aquarea Smart Cloud, makes Panasonic a trusted heating partner.**



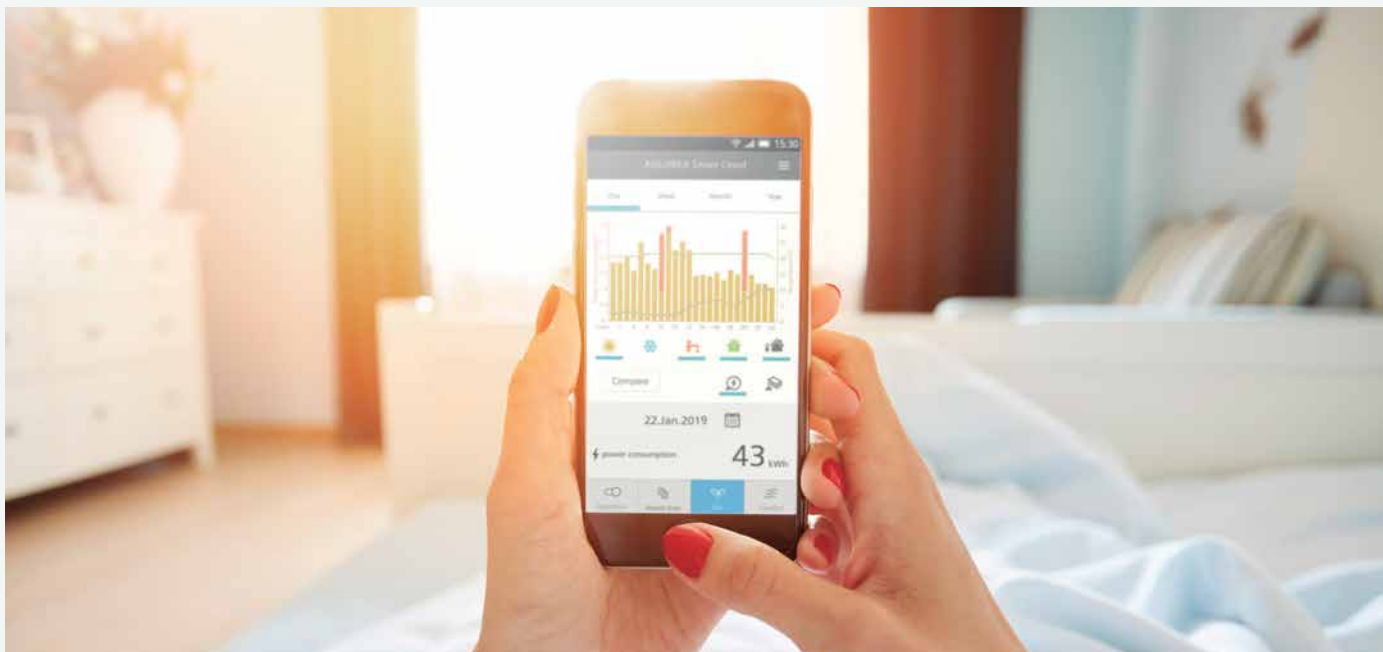

## AQUAREA SMART CLOUD: THE MOST ADVANCED HEATING CONTROL FOR TODAY AND FOR THE FUTURE.



WATCH DEMO


### Aquarea Smart Cloud for end users

#### Easy and powerful energy management

The Aquarea Smart Cloud is much more than a simple thermostat for switching a heating device ON or OFF. It is a powerful and intuitive service for remotely controlling the full range of heating and hot water functions, including monitoring energy consumption.

#### How does it work?

Connect Aquarea J and H Generation system to the cloud using wireless LAN or a wired LAN Network. The user connects to the Cloud portal to remotely operate all unit functions and can also permit partners to access customised functions for remote maintenance and monitoring.

Aquarea Smart Cloud works with 

Aquarea Comfort Cloud connected to IFTTT is planned to be available in Autumn 2019

### Aquarea Service Cloud for installers and maintenance

The real remote maintenance made simple: The Aquarea Service Cloud allows installers to remotely take care of their customer's heating system, saving time and money. It also shortens the response time, increasing customer satisfaction.


#### Advanced functions for remote maintenance with professional screens:

- Global view at a glance
- Error log history
- Full unit information
- Statistics always available
- Most settings available



\* User interface image may change without notification.

Combine Aquarea Mono-bloc with a high efficiency optional accessories for higher energy savings.

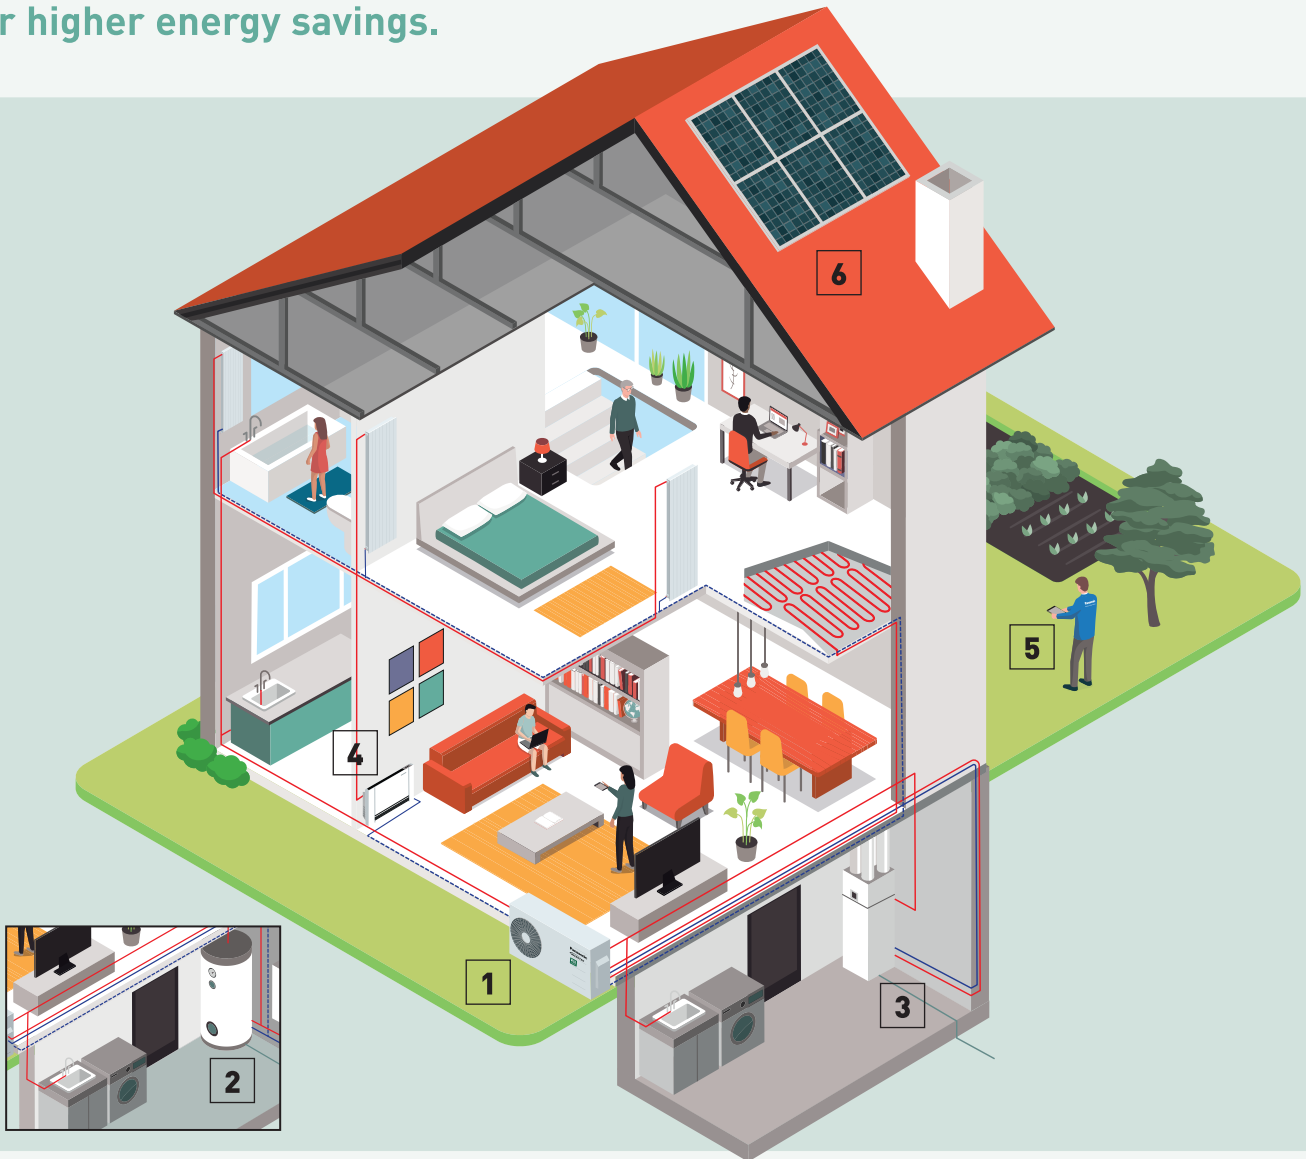

**1**  
Mono-bloc system.



**2**  
DHW Tanks (optional)  
Combo Tank, Enamelled Tank or  
Stainless Steel Tank.



**3**  
Heat Recovery Ventilation + DHW  
Tank (optional).



**4**  
Fan coils for heating and cooling  
(optional).



**5**  
Control through  
smartphone, tablet or  
computer (optional,  
requires CZ-TAW1).



**6**  
Heat Pump + HIT  
Photovoltaic solar panel  
(optional).



Anti-freeze valve  
(Optional,  
PAW-A2W-AFVLV).



Wired LCD room  
thermostat with weekly  
timer (optional,  
PAW-A2W-RTWIRED).




Wireless LCD room  
thermostat with weekly  
timer (optional,  
PAW-A2W-RTWIRELESS).

# New Aquarea High Performance Mono-bloc J Generation Single Phase. Heating and Cooling - MDC

- R32 refrigerant

- Optional Smartphone control
- Maximum hydraulic module output temperature: 60 °C
- High heating and cooling capacities, even at low outdoor temperatures
- Operation in cooling mode at outdoor temperatures as low as 10 °C
- Built-in magnet filter for easy installation



**CZ-TAW1**  
Cloud connection. For user control and installer remote maintenance.

		Single Phase Heating and Cooling			
Outdoor unit		WH-MDC05J3E5	WH-MDC07J3E5	WH-MDC09J3E5	
Heating capacity / COP (A +7 °C, W 35 °C)	kW / COP	5,00/5,08	7,00/4,76	9,00/4,48	
Heating capacity / COP (A +7 °C, W 55 °C)	kW / COP	5,00/3,01	7,00/2,82	8,95/2,78	
Heating capacity / COP (A +2 °C, W 35 °C)	kW / COP	5,00/3,57	7,00/3,40	7,45/3,13	
Heating capacity / COP (A +2 °C, W 55 °C)	kW / COP	5,00/2,27	6,30/2,16	7,00/2,12	
Heating capacity / COP (A -7 °C, W 35 °C)	kW / COP	5,00/2,78	6,80/2,81	7,50/2,63	
Heating capacity / COP (A -7 °C, W 55 °C)	kW / COP	5,00/1,85	6,30/1,86	7,00/1,80	
Heating capacity / COP (A -15 °C, W 35 °C)	kW / COP	5,00/2,30	5,60/2,33	7,60/2,23	
Cooling capacity / EER (A 35 °C, W 7 °C)	kW / EER	5,00/3,31	7,00/3,06	9,00/2,71	
Cooling capacity / EER (A 35 °C, W 18 °C)	kW / EER	5,00/5,05	7,00/4,73	9,00/4,25	
Seasonal energy efficiency - Heating average climate (W35 °C / W55 °C)	ηs %	202/142	193/130	193/130	
	SCOP	5,12/3,63	4,90/3,32	4,90/3,32	
Energy class heating average climate (W35 °C / W55 °C)		A+++ to D	A+++/A++	A+++/A++	
Seasonal energy efficiency - Heating warm climate (W35 °C / W55 °C)	ηs %	237/165	227/160	227/160	
	SCOP	6,00/4,20	5,75/4,07	5,75/4,07	
Energy class heating warm climate (W35 °C / W55 °C)		A+++ to D	A+++/A+++	A+++/A+++	
Seasonal energy efficiency - Heating cold climate (W35 °C / W55 °C)	ηs %	160/115	164/116	164/116	
	SCOP	4,08/2,95	4,18/2,98	4,18/2,98	
Energy class heating cold climate (W35 °C / W55 °C)		A+++ to D	A++/A+	A++/A+	
Sound power part load <sup>1)</sup>	Heat	dB(A)	59	59	59
Sound power full load	Heat / Cool	dB(A)	64/65	68/67	69/68
Dimension	HxWxD	mm	865 x 1283 x 320	865 x 1283 x 320	865 x 1283 x 320
Net weight		kg	99	104	104
Refrigerant (R32) / CO <sub>2</sub> Eq. <sup>2)</sup>		kg / T	1,3/0,878	1,3/0,878	1,3/0,878
Water pipe connector		Inch	R 1½	R 1½	R 1½
Pump	Number of speeds		Variable Speed	Variable Speed	Variable Speed
	Input power (Min/Max)	W	34/96	36/100	39/108
Heating water flow (ΔT=5 K, 35 °C)		L/min	14,3	20,1	25,8
Capacity of integrated electric heater		kW	3	3	3
Input Power	Heat	kW	0,985	1,47	2,01
	Cool	kW	1,51	2,29	3,32
Running and Starting current	Heat	A	4,7	7,0	9,3
	Cool	A	7,0	10,5	14,7
Current 1		A	12	17	17
Current 2		A	13	13	13
Recommended fuse		A	30/15	30/15	30/16
Recommended cable size, supply 1 / 2		mm <sup>2</sup>	3x 1,5/3x 1,5	3x 2,5/3x 1,5	3x 2,5/3x 1,5
Water outlet	Heat	°C	20~60	20~60	20~60
	Cool	°C	5~20	5~20	5~20
		<b>Eur</b>	<b>4734,00</b>	<b>5069,00</b>	<b>5960,00</b>

### Accessories (optional)

<b>PAW-TD20C1E5</b>	Tank 200L - Stainless steel
<b>PAW-TD30C1E5</b>	Tank 300L - Stainless steel
<b>PAW-TA20C1E5STD</b>	Tank 200L - Enamelled
<b>PAW-TA30C1E5STD</b>	Tank 300L - Enamelled
<b>PAW-TD20B8E3-1</b>	Combo Tank 185L + 80L - Enamelled
<b>PAW-TD23B6E5</b>	Combo Tank 230L + 60L - Stainless steel
<b>PAW-3WYVLV-HW</b>	3 way valve for DHW Tanks

### Accessories (optional)

<b>PAW-BTANK50L-2</b>	Buffer tank 50L
<b>CZ-TAW1</b>	Aquarea Smart Cloud for remote control and maintenance through wireless or wired LAN
<b>PAW-A2W-RTWIRED</b>	Room thermostat
<b>PAW-A2W-RTWIRELESS</b>	Wireless LCD room thermostat
<b>PAW-A2W-AFVLV</b>	Anti-freeze valve.

<sup>1)</sup> Sound power in accordance to 8112013,81312013 and EN12102-1:2017 at +7 °C. <sup>2)</sup> WH-MDC models are hermetically sealed. EER and COP calculation is based in accordance to EN14511. \* Available in May 2020.

# AQUAREA

## Aquarea High Performance: Energy saving

Aquarea High Performance delivers outstanding efficiency in heating and domestic hot water. It is easy to maintain thanks to the built-in devices such as the water filter, water flow sensor and optional connectivity to the Smart Cloud remote service.

5,08  
COP

60°C

HOT WATER SUPPLY

A CLASS  
WATER PUMP

AUTO SPEED

A++

ErP 55°C  
Scale from A+++ to D

A+++

ErP 35°C  
Scale from A+++ to D

R32



DHW



WATER FILTER



FLOW SENSOR



BOILER CONNECTION



SOLAR KIT



ADVANCED CONTROL



OPTIONAL WLAN



BMS CONNECTIVITY



5 YEARS COMPRESSOR WARRANTY

Refrigerant gas R32. The systems using R32 refrigerant are more environmentally friendly than other refrigerants like R22 and R410A. — Inverter compressor provides more precise temperature control and keeps the ambient temperature constant with lower energy consumption and quieter operation. — DHW. With Aquarea you can also heat your domestic hot water at a very low cost with the optional hot water cylinder. — Water filter with magnet. Easy access & fast clip technology for J Generation. — Water flow sensor Renovation.

Our Aquarea Heat Pumps can be connected to an existing or new boiler for optimum comfort even at very low outdoor temperatures. — Solar kit. For even greater efficiency, our Aquarea Heat Pumps can be connected to photovoltaic solar panels with an optional kit. — Advanced control. Remote controller with full dotted 3,5" wide back light screen. Menu with 17 available languages easy to use for installer and user. Included on J Generation. — Internet control (Optional). A next generation system providing a user-friendly remote controller of air conditioning or Heat Pump units from everywhere, using a simple Android or iOS smartphone, tablet or PC via internet. — Connectivity. The communication port can be integrated into the indoor unit and provides easy connection to, and control of, your Panasonic Heat Pump to your home or building management system. — 5 years compressor warranty. We guarantee the outdoor unit compressors in the entire range for five years.

**Panasonic**

● ● ● ● siltumsūkņi



SG Ready: Thanks to Aquarea HPM, Aquarea range (Bi-bloc and Mono-bloc) is holding the SG Ready Label (Smart Grid Ready Label), given by Bundesverband Wärmepumpe (German Heat Pump Association). This Label shows the real capacity of Aquarea to be connected in an intelligent grid control. MCS Certificate number: MCS HPD006.\*



Oficiālais Panasonic siltumsūkņu izplatītājs un sertificēts servisa centrs Baltijā "RIKON AC" [www.gaiss-udens.lv](http://www.gaiss-udens.lv)

Nedrīkst pārpublicēt bez iepriekšējas "Rikon AC" rakstiskas piekrišanas. Iekārtu specifikācija un dizains var tikt mainīti bez iepriekšēja brīdinājuma.